



# C125 - COLOUR DISPLAY LOGGER



The C125 comes standard as a combined full colour display and powerful control device that is readable in direct sunlight. With the addition of the Data Logging upgrade it becomes a fully programmable data logger with 120 MB memory.

Displayed channels and labels are configurable on supplied layouts. The C125 acquires data from devices such as an ECU and displays data channels, warning alarms, lap times, fuel calculations and much more.

## ► FEATURES

- High resolution 125 mm (5" approx) colour LCD display
- High brightness for sunlight readability
- 10 full colour (RGB) LEDs; colour, function and intensity are fully programmable
- Suitable for bikes, cars, marine and industrial applications
- Supports Wideband Lambda from MoTeC PLMs or LTCs
- Easily integrates with MoTeC CAN based products such as ECUs and expanders. Full I/O expansion available with use of E888, E816 expanders.
- GPS Lap Timing

## ► OPTIONAL UPGRADES

- 29600 – C125 I/O
- 29618 – C125 120MB LOGGING
- 29620 – C125 PRO ANALYSIS
- 29616 – C125 DISPLAY CREATOR

## ► SPECIFICATIONS

### Display

- Type: Colour TFT LCD, anti-reflective
- Resolution: 800 x 480, anti-aliased graphics
- Layouts: selectable fixed layouts, user programmable layouts available in future releases.
- 48 user-defined, scrollable message lines with programmable overrides
- 3 programmable modes with customisable labels

### Logging - optional (requires logging upgrade)

- 120 MB logging memory
- Logging rates up to 500 samples per second
- Fast Ethernet download
- Includes i2 Standard data analysis software (Pro Analysis upgrade available)

**Inputs**

2 Digital and 3 Speed inputs

**Inputs - optional (requires I/O upgrade)**

- 6 analogue voltage inputs:
  - 4 x 0 to 5.46 V, 1.33 mV resolution
  - 2 x 0 to 15.0 V, 3.66 mV resolution
- 2 analogue temperature inputs
  - 0 to 15 V, 3.66 mV resolution

**Outputs - optional (requires I/O upgrade)**

- 4 low side outputs PWM or switched operation
- 0.5 Amp max, current limited and thermal overload protected

**Expanders**

Compatible with E816 and E888 expanders (providing full functional use)

**Internal Sensors**

- 3-axis accelerometer, detection range: +/- 5G
- Dash temperature sensor
- Sensor supply voltage
- Battery voltage

**Communications**

- 2 configurable CAN buses, with individually programmable CAN bus speeds. One can be used as RS232 Receive.
- 2 RS232 ports, one with transmit and receive, one with receive only

**Power supply**

- Operating voltage: 6 to 32 V DC
- Operating current: 0.5 A typical at 14 V (excluding sensor currents)
- Reverse battery protection
- Battery transient protection

**Sensor supply currents**

- 5 V sensor supply: 0.25 A maximum
- 8 V sensor supply: 0.25 A maximum

**Operating temperature**

- Internal: -20 °C to 70 °C (above 60 °C maximum backlight brightness progressively reduced)
- Typical ambient temperature range in free air: -20 °C to 55 °C

**Physical**

- Size: 134.5 x 103.9 x 20.2 mm excluding connector
- Weight 360 g
- 1 x 34 pin waterproof connector

**▶ SCREEN CLEANING**

Wipe using a clean water dampened microfibre cloth, followed by a clean dry microfibre cloth.

**▶ COMPATIBILITY**

MoTeC ECUs: M4\*, M48\*, M8\*, M84, M400, M600, M800, M880, M1

MoTeC Accessories: E816, E888, SLM, PLM, LTC, BR2, PDM, GPS, VCS etc.

Many non-MoTeC devices

\*For some ECUs, an additional cable/adaptor may be required in conjunction with the RS232 adaptor.

**▶ SOFTWARE**

Windows-based software designed for setup and management of the display and data logging system, that provides:


- Configuration of the inputs, outputs, LEDs, display, data logging and calculations
- Offline generation of a configuration file that can then be sent to the device.
- Channel monitoring
- Firmware updating and extensive help screens

▶ **ETHERNET WIRING**

Ethernet Connector		MoTeC Loom Colour	C125	
Pin	Function		Pin	Function
1	ethernet TX +	orange/white	11	ethernet RX +
2	ethernet TX -	orange	10	ethernet RX -
3	ethernet RX +	green/white	2	ethernet TX +
6	ethernet RX -	green	1	ethernet TX -

⇒ The wiring specified is the preferred cross-over configuration. However, the wiring can also be configured as straight-through. Cat 5 Ethernet cable must be used.

**Pin Numbering**



▶ **ECU WIRING**


When using an M4, M48 or M8 ECU, the C125 should be connected via RS232. For some ECUs, a PCI cable may also be required.

The Display Logger should be connected via the CAN bus when using a 'hundred series' ECU (M400/M600/M800/M880) or M84, and any number of other CAN devices. See the following example.

Detailed wiring information is available in the user manual at [www.motec.com/downloads](http://www.motec.com/downloads).

▶ **DIMENSIONS AND MOUNTING**

Measurements in mm.

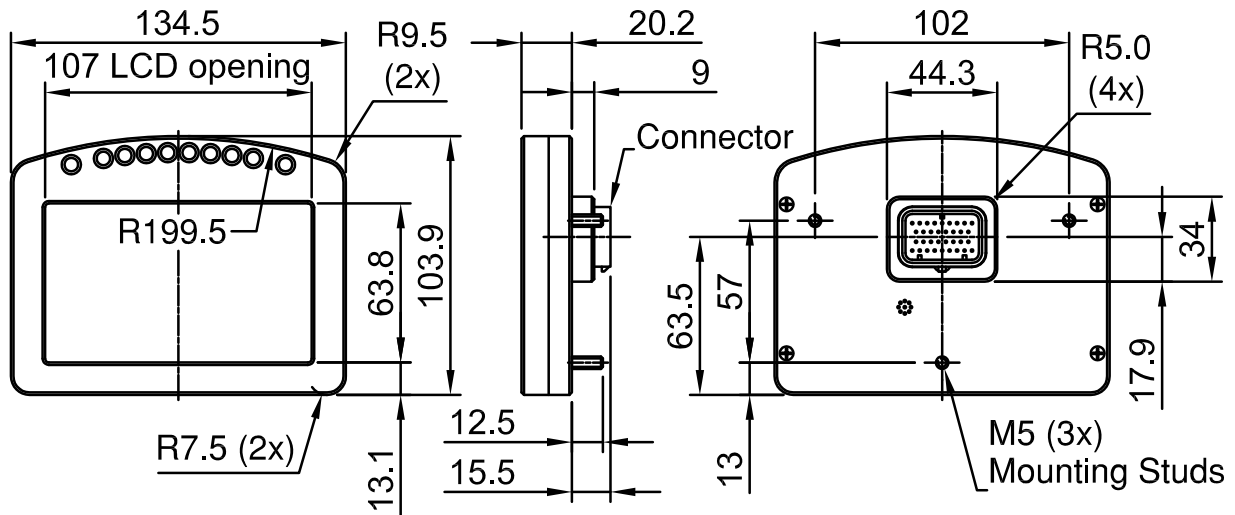

⇒ **Note:** Do not remove any part of the casing. The case provides electromagnetic screening to avoid interference with other equipment, and is also essential for thermal management. Thermal management may be compromised if mounted in a confined space, refer to the operating temperature specifications.  
Ensure product is not stressed when mounted.

## ▶ PINOUT

**Mating Connector:** Part number 65044

Pin	Name	Standard Function	Optional Function (12 I/O upgrade #29500)
1	E-TX-	Ethernet Transmit -	
2	E-TX+	Ethernet Transmit +	
3	AV1		Analogue Voltage Input 1
4	AV2		Analogue Voltage Input 2
5	AV3		Analogue Voltage Input 3
6	AV4		Analogue Voltage Input 4
7	8V	Sensor 8 V	
8	5V	Sensor 5 V	
9	0V	Sensor 0 V	
10	E-RX-	Ethernet Receive -	
11	E-RX+	Ethernet Receive +	
12	AV5		Analogue Voltage Input 5
13	AV6		Analogue Voltage Input 6
14	DIG1	Digital Input 1	
15	DIG2	Digital Input 2	
16	AT1		Analogue Temp Input 1
17	AT2		Analogue Temp Input 2
18	CAN1L	CAN1 Lo	
19	CAN1H	CAN1 Hi	
20	RS232-1 TX	RS232-1 Transmit Output	
21	SPD1	Speed Input 1	
22	SPD2	Speed Input 2	
23	SPD3	Speed Input 3	
24	Not used	Not used	
25	RS232-2 RX	RS232-2 Receive Input	
26	CAN2L	CAN2 Lo / RS232 Ground Input	
27	CAN2H	CAN2 Hi / RS232 Receive Input	
28	RS232-1 RX	RS232-1 Receive Input	
29	AUX1		Auxiliary Output 1
30	AUX2		Auxiliary Output 2
31	AUX3		Auxiliary Output 3
32	AUX4		Auxiliary Output 4
33	BAT+	Battery Positive	
34	BAT-	Battery Negative	